

# SUBMERSIBLE PUMPS

## Outstanding Features

- Oil Bathed Double Mechanical Seals, Allows for Periods of Dry Run
- Lightweight, Compact, and Easy to Carry.
- Non-Toxic DTE 24 Light Paraffin Oil
- Fits into Small Diameter Holes
- Thermal Protected Motors
- Completely Rebuildable Pumps
- Single Piece Molded Power Cords, Ensures a Water Tight Seal
- Optional Float Switches Available for All Models  
(PB-68011 must be wired for 220v to utilize FS-30 Float Switch)
- One Year Limited Warranty




**PB-65011**



**PB-68011**

PERFORMANCE CURVES

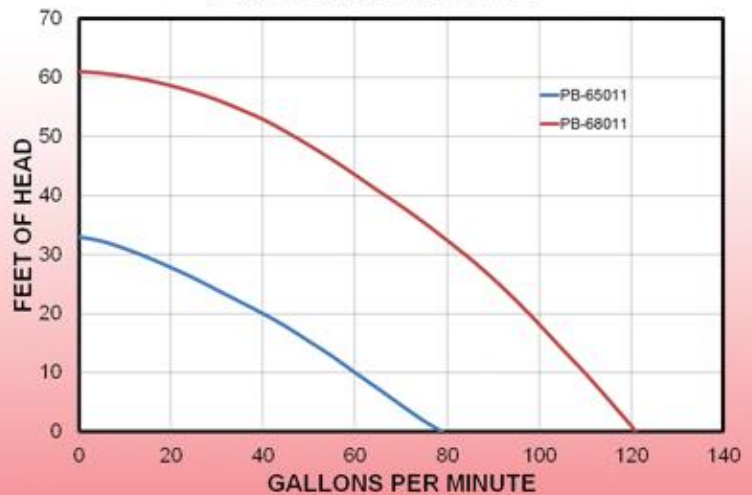

	PB-65011	PB-68011
Discharge Size	2" NPT	3" NPT
Maximum Output (GPH)	4760	7286
Max Discharge Head (ft)	33	61
Voltage	110	110 / 220
Rated Current (Amp)	7.2	30 / 15
Motor Output (Hp)	1/2	2
Cable Length (ft)	20	40
Packaged Weight (Lbs)	36	60
Minimum Diameter Hole (in)	7¾"	9½"
Pack Dimensions (LxWxH)	8"x8"x17	10"x10"x25"