
Outstanding Features

- •Built to Run Dry. Perfect for Areas of Low Seepage
- Positive Displacement Pressure for Thicker than Water Viscosities
- Straight Line Flow Design is Self-Cleaning and Reduces Clogging
- Thermal Plastic Rubber Diaphragm and Polyurethane Flapper Valves
- •Oil Filled Gear Reduction for Quiet Operation and Less Vibration
- External Pump Parts are Made of Die Cast Aluminum for Strength, Weight Reduction, and Portability
- •Honda GX120 Engines with Low Oil Shut Off
- . Maximum Head of 25'
- Wheel Kit is Standard
- Two Year Limited Warranty



KDP-50X

KDP-80X

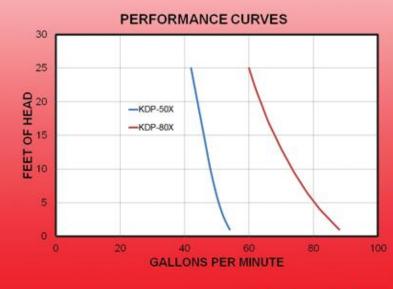

	KDP-50X	KDP-80X
Suction, Discharge Size	2" NPT	3" NPT
Maximum Output (GPM)	52	88
Maximum Discharge Head (ft)	25	25
Maximum Suction Lift (ft)	26	26
Engine Model	GX120	GX120
Engine Displacement (cc)	118	118
Engine Horse Power	3.5	3.5
Fuel Tank Capacity (Gal)	0.66	0.66
Full Load Run Time (hrs)	2.5	2.5
Fuel Type	Automotive Gasoline	
Packaged Weight (Lbs)	168	172
Packaged Dimensions (LxWxH)	33"x31"x31"	33"x31"x31"