



# KOSHIN 1" CENTRIFUGAL PUMPS



## SEH-25L / SEM-25E

### Features

- All aluminum die cast pump housing, impeller and volutes for lightweight and portability.
- Completely rebuildable.
- High Grade carbon/ceramic mechanical seal.
- Available with CARB approved 4-cycle Honda engine or 2-cycle Mitsubishi engine.


### Applications

- Construction and industrial dewatering.
- Utilities, manhole and vault draining.
- Landscape and irrigation.

### Specifications

Model	SEH-25L	SEM-25E
Discharge Size	1"	1"
Maximum Capacity	30 G.P.M	29 G.P.M.
Maximum Head	106 Ft.	98 Ft.
Maximum Suction	26 Ft.	26 Ft.
Engine Type	Honda GX 25	Mitsubishi TLE 20
Displacement	25 CC	20 CC
Horse Power	1.1 HP	0.8 HP
Fuel Capacity	1.25 pint	1 pint
Fuel	Gasoline	2-cycle mix
Starting	Recoil Starting	Recoil Starting
Dimensions LxHxW	12"x13"x9"	12"x13"x9"
Net Weight	13 lbs.	11 lbs.

### Performance Curve

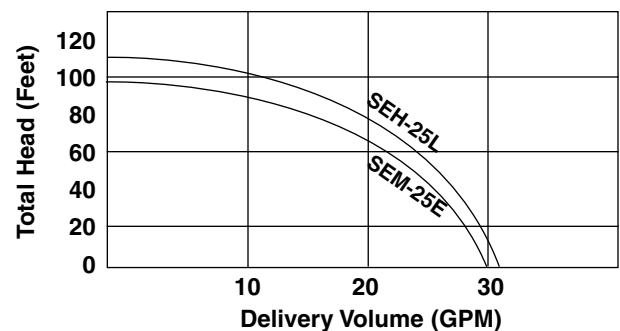

**KOSHIN AMERICA CORP.**

1218 Remington Road • Schaumburg, IL 60173  
847/884-1570 • 800/634-4092 • FAX 847/310-0740

Distributed by: